




# Copper Plumbing Tubes

Product Range 2020

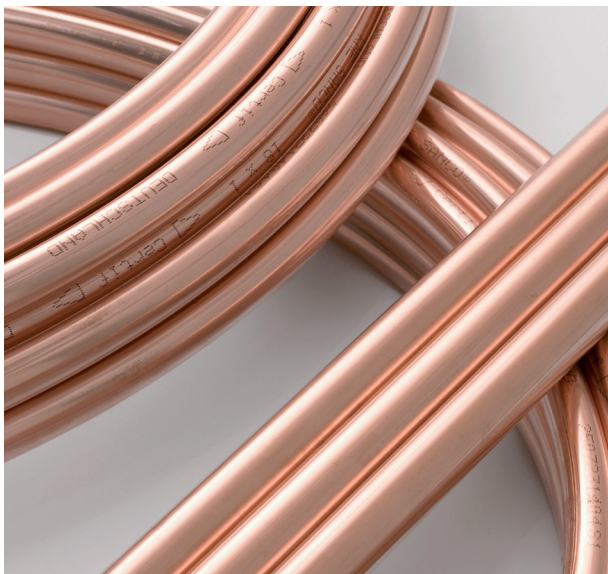

# SANCO®


## Manufacturing Programme and Technical Data



SANCO® is Europe's No. 1 plain copper plumbing tube and can be used in all areas of domestic plumbing.

- in coils of 25 m and 50 m
- in straight lengths of 5 m

Outer diameter x wall thickness (mm)	Copper Weight (kg/m)	Perm. working pressure* (bar)	Water Volume (l/m)	Availability		
				5m lengths	25m coils	50m coils
6 x 1,0**	0,140	229	0,013	•		•
8 x 1,0**	0,196	163	0,028	•		•
10 x 1,0**	0,252	127	0,050	•		•
12 x 1,0	0,308	104	0,079	•		•
15 x 1,0	0,391	82	0,133	•		•
18 x 1,0	0,475	67	0,201	•	•	
22 x 1,0	0,587	54	0,314	•	•	
28 x 1,0*	0,755	42	0,531	•		
35 x 1,0	0,951	33	0,855	•		
35 x 1,2	1,134	41	0,835	•		
35 x 1,5	1,410	51	0,804	•		
42 x 1,0	1,146	28	1,257	•		
42 x 1,2	1,369	34	1,232	•		
42 x 1,5	1,700	42	1,195	•		
54 x 1,0	1,482	22	2,124	•		
54 x 1,5	2,202	33	2,043	•		
54 x 2,0	2,908	44	1,963	•		
64 x 2,0	3,467	37	2,827	•		
76,1 x 2,0	4,144	31	4,083	•		
88,9 x 2,0	4,859	26	5,661	•		
108 x 2,5	7,374	27	8,332	•		
133 x 3,0	10,904	26	12,668	•		
159 x 3,0	13,085	22	18,385	•		
219 x 3,0	18,118	16	35,633	•		
267 x 3,0	22,144	13	53,502	•		

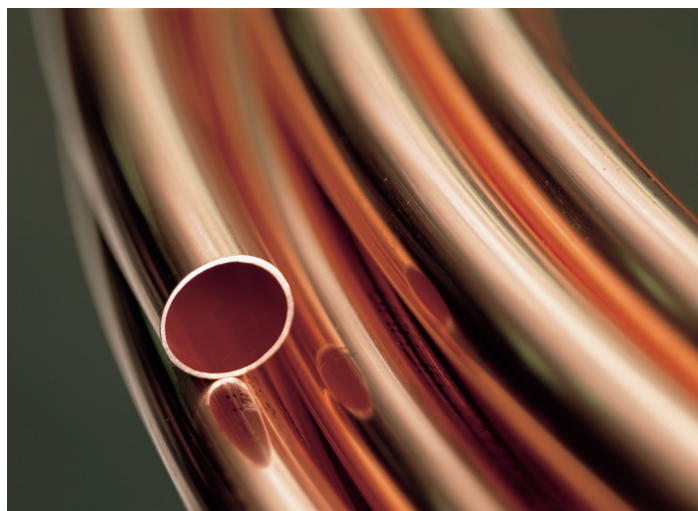

### WICU®



The plastic-covered copper tube is designed for all applications in domestic plumbing, especially where good exterior protection is needed.

- in coils of 25 m
- in straight lengths of 5 m

Outer diameter x wall thickness (mm)	Copper Weight (kg/m)	Perm. working pressure* (bar)	Water Volume (l/m)	TOTAL outer diameter (mm)	Availability 5m lengths	25m coils
6 x 1,0**	0,140	229	0,013	9		•
8 x 1,0**	0,196	163	0,028	11		•
10 x 1,0**	0,252	127	0,050	13		•
12 x 1,0	0,308	104	0,079	16	•	•
15 x 1,0	0,391	82	0,133	19	•	•
18 x 1,0	0,475	67	0,201	22	•	•
22 x 1,0	0,587	54	0,314	26	•	•
28 x 1,0	0,755	42	0,531	33	•	
35 x 1,2	1,134	41	0,835	40	•	
42 x 1,2	1,369	35	1,232	48	•	
54 x 1,5	2,202	33	2,043	60	•	

### WICU®Flex



The tube is fitted with a flexible PE sheath, which reduces sound transmission as well as condensation and heat losses.

- in coils of 25 m

Outer diameter x wall thickness (mm)	Copper Weight (kg/m)	Perm. working pressure* (bar)	Water Volume (l/m)	TOTAL outer diameter (mm)	Availability 25m coils
12 x 1,0	0,308	90	0,079	24	•
15 x 1,0	0,391	71	0,133	27	•
18 x 1,0	0,475	58	0,201	30	•
22 x 1,0	0,587	47	0,314	34	•



\* The max. permissible working pressure was calculated based on annealed copper tubes at  $R_m = 200 \text{ N/mm}^2$  and a security value of 4. The max. permissible working pressure applies to the copper tube, not to the tube joints. Other standard specifications on request.

\*\* These sizes are not DVGW-GW 392 approved (technical rules of DVGW).

SANCO® and WICU® are registered trademarks of HME Copper Germany GmbH

**HME Copper Germany GmbH**

Carl-Benz-Str. 13  
58706 MENDEN  
DEUTSCHLAND

Fon +49 541 939 336-30  
info-tubes@HMEmetal.com

[www.HMEmetal.com](http://www.HMEmetal.com)

Plumbing Tubes



SANCO® and WICU® are registered trademarks of HME Copper Germany GmbH

All changes reserved. Owing to limitations in printing technology, the colours reproduced in this brochure should be regarded as approximate equivalents to the colours described.

Status December 2019

