

Bag Filter MAXILINE

VMBF-0402-AS10-100D

Specification

Code Number

F610191

Technical Data

Max. flow rate	m³/h	160
Filter area	m²	2
No. of restrainer baskets	qty	4
Filter housing volume (V)	litre	205
Filter housing weight	kg	approx. 220
Installation height	mm	approx. 2300
Installation space	mm	approx. 1000 x 1000
Lid configuration		with spring aided lifter
Design code		AD 2000-Merkblätter
PED 97/23/EC classification		Art. 3 § 3

Material of construction

Housing	min. Stainless Steel 316
Restrainer basket	min. Stainless Steel 316
Closure (QIC-LOCK)	min. Stainless Steel 316
Other parts (non wetted)	Stainless Steel 304
Gaskets	NBR

Design data

Max. allowable pressure (PS)	bar	10
Min./max. allow. Temp. (TS)	°C	-10/ +120

Housing connections

N1/N2 (inlet/ outlet)	DN 100 PN16 (DIN 2633)
N3/N4 (lid holes)	BSP socket 1"
N7 (draining)	ball valve 1"

Packing

Dimensions (L x W x H)	mm	1200 x 800 x 2000
------------------------	----	-------------------



Spare parts

Restrainer basket	BKT-AS-AC-02
Bag fixing ring	BFR-MBF-AC
NBR Lid gasket	ORG-VMBF-B-M04

Accessories (optional)

Mesh strainers (25 - 800 µm)	FMB-AS-AC-02-(25-800)
Evacuation balloon	BAL-SE-AC-02
Bag positioner	BLK-SE-AC-02
LOFNETIC magnetic insert	LOFNET 1BAR/2BAR-02
Pressure gauge (10bar) G ½"	M-10-S-1/2
Reducer 1" nipple ½" socket	RV-025C/015B-AC
Vent valve G 1"	E-1-S
Double nipple 1"	DN-1-S
Gaskets available in	FPM, EPDM, FEP/FPM, FEP/Si

(Changes possible w/o notice)

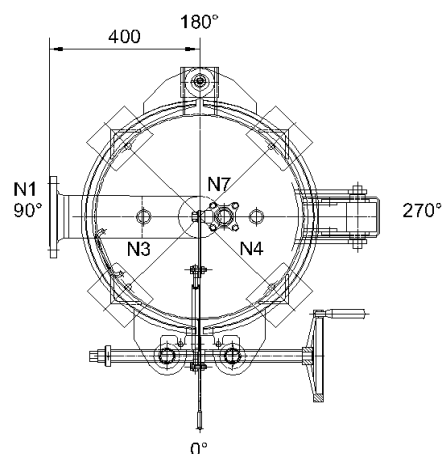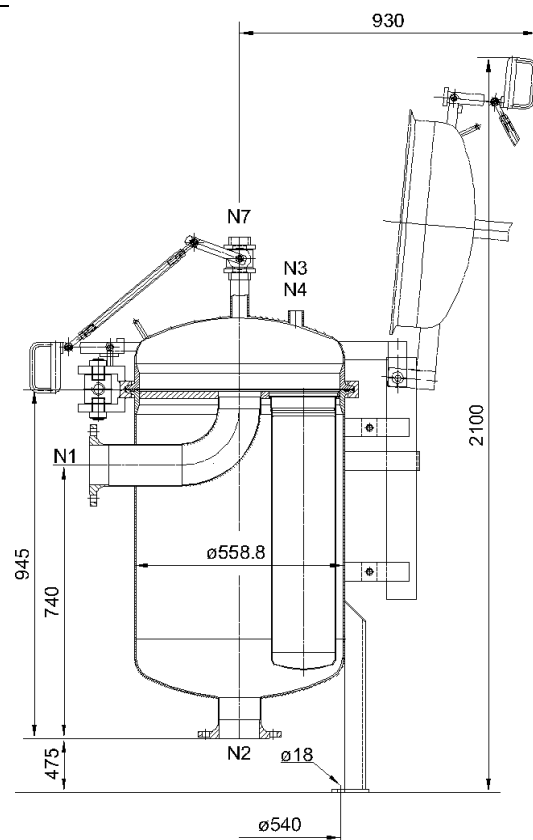

Rev. March 2003