


Bag Filter MAXILINE

MBF-0402-AS10-100D

Specification

Code Number	F610176
Technical Data	
Max. flow rate	m ³ /h 160
Filter area	m ² 2
No. of restrainer baskets	qty 4
Filter housing volume (V)	litre 205
Filter housing weight	kg approx. 220
Installation height	mm approx. 2270
Installation space	mm approx. 1000 x 1000
Lid configuration	with spring aided lifter
Design code	AD 2000-Merkblätter
PED 97/23/EC classification	Art. 3 § 3
Material of construction	
Housing	min. Stainless Steel 316
Restrainer basket	min. Stainless Steel 316
Closure (swing eyebolts)	Carbon Steel Zinc plated
Other parts (non wetted)	Stainless Steel 304
Gasket	NBR
Design data	
Max. allowable pressure (PS)	bar 10
Min./max. allow. Temp. (TS)	°C -10/ +120
Housing connections	
N1/N2 (inlet/ outlet)	DN 100 PN16 (DIN flange)
N3/N4 (lid holes)	BSP socket 1"
Packing	
Dimensions (L x W x H)	mm 1200 x 800 x 1600
Spare parts	
Restrainer basket	BKT-AS-AC-02
Bag fixing ring	BFR-MBF-AC
NBR lid gasket	ORG-MBF-B-M04
Swing eyebolts (10 per housing)	EBS-M24-ZA-140
Accessories (optional)	
Mesh strainers (25 - 800 µm)	FMB-AS-AC-02-(25-800)
Evacuation balloon	BAL-SE-AC-02
Bag positioner	BLK-SE-AC-02
LOFNETIC magnetic insert	LOFNET 1BAR/2BAR-02
Pressure gauge (10bar) G ½"	M-10-S-1/2
Reducer 1" nipple ½" socket	RV-025C/015B-AC
Vent valve G 1"	E-1-S
Double nipple 1"	DN-1-S
Gaskets available in	FPM, EPDM, FEP/FPM, FEP/Si

(Changes possible w/o notice)

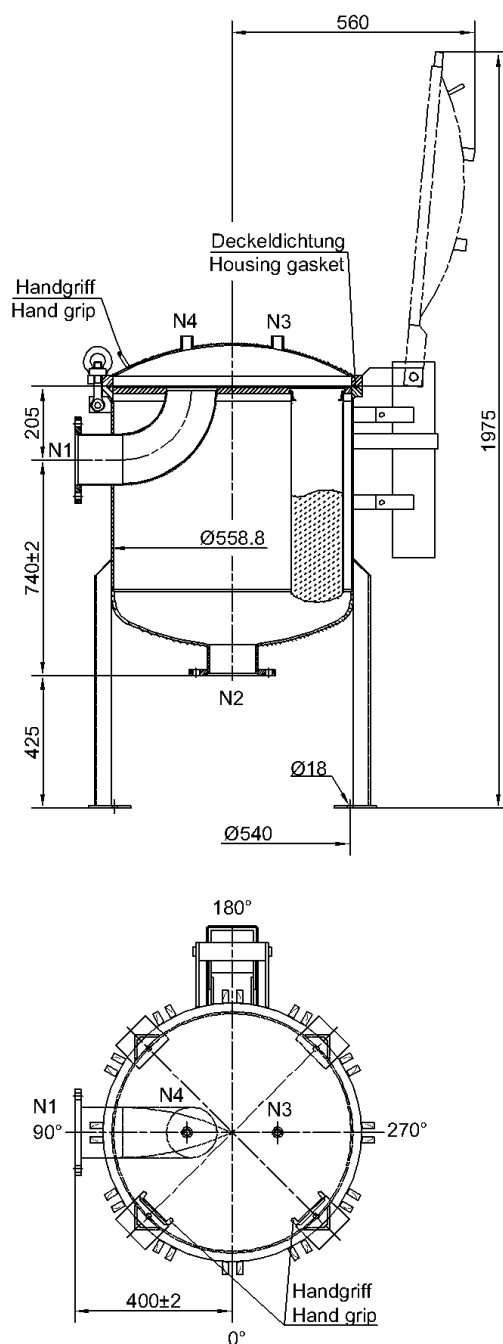

Rev. March 2003